



WELLINGTON VELOUR

MADE IN THE UK. MADE TO LAST.

Specification

PRODUCT	Wellington Velour Heavy Contract Carpet and Tiles
FIBRE CONSTRUCTION	90% Polypropylene, 10% Recycled Polyester
WEIGHT	1180gm metre ² (Sheet), 4180gm metre ² (Tile)
THICKNESS	10mm (Sheet), 11.20mm (Tile)
ROLL WIDTH	2 metre
TILE SIZE	50cm x 50cm (Tiles are Bitumen backed)
COLOUR FASTNESS	Light (BS EN ISO 105:802) >6 Wet Rubbing (BS EN ISO 105:B01) 5 Dry Rubbing (BS EN ISO 105:X12) 5
FLAMMABILITY	(BS5287) Assessment and labelling of Textile Floorcoverings tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char
BS EN 13501	Euroclass E _{fl} (Sheet) Euroclass B _{fl} -s1 (Tile)
REDUCTION IN IMPACT NOISE	BS EN ISO 140-24dB
ANTISTATIC	Suitable for use in computer rooms
INSTALLATION	 TILE The method of installation should conform to BS5325. For details of subfloor preparation and a full guide to installation visit: www.heckmondwike-fb.co.uk . Before laying Wellington Velour, tiles should be allowed to condition for 24 hours at the expected temperature and humidity levels. Wellington Velour tiles should be laid rotationally, alternating the direction of the tiles through 90°
ADHESIVE GUIDE	Sheet carpet should be fully adhered with F Ball's F3 or Bostik Laybond Carpet Adhesive. For tiles, use Tackifier F41 or Bostik Laybond Carpet tile Tackifier
MAINTENANCE	To achieve maximum life expectancy, it is essential to initiate a maintenance schedule from the date of installation. A full guide to cleaning & maintenance is available at: www.heckmondwike-fb.co.uk

PLEASE NOTE: For technical reasons, as with all textile materials, it is not possible to colour match from different batches. Orders that need to colour match should be placed at the same time. Production may, therefore, show variations to the sample card. Heckmondwike reserves the right to change or modify product specifications without giving prior notice.

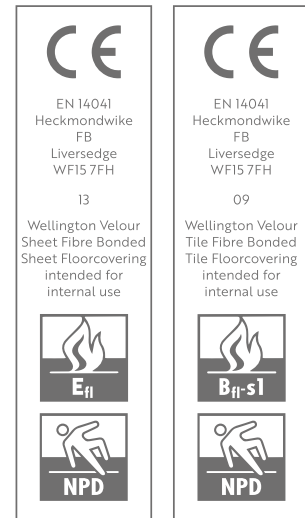

BCFA
member