


LG Hausys flooring DECOTILE

1. Product Structure

Decotile 55 : 2.5T X 180mm X 1,200mm, 2.5T X 300mm X 600mm
Decotile 30 : 2.0T X 180mm X 1,200mm, 2.0T X 300mm X 600mm

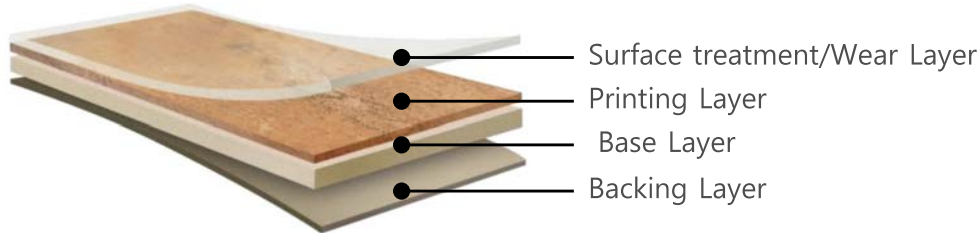

2. Features

- **Eco & Human-friendly Product**

- Low TVOCs
- Free of 6 types of harmful phthalate plasticizer(DOP, BBP, DBP, DIDP, DnOP, DINP)

- **Excellence in Design**

- Natural and modern color palette, High-resolution imaging and patterns for realistic wood visuals

- **Durable Technology**

- LG's exclusive PUR double coating improves resistance to scratches and stains
- Easy cleaning and low maintenance cost(No wax & No polish needed)

3. Technical Data

Characteristic	Standard	Decotile 30	Decotile 55
		2T	2.5T
Type of Flooring	EN ISO 10582	PVC Heterogeneous	PVC Heterogeneous
Surface Treatment		PUR	PUR
Size	EN ISO 24342	≤0.15%	≤0.15%
Straightness & Squareness		≤0.35%	≤0.35%
Classification	EN 685	Class 23/31	Class 23/33/42
Overall Thickness	EN ISO 24346	2.0mm	2.5mm
Wear Layer Thickness	EN ISO 24340	0.3mm	0.55mm
Wear Resistance	EN 660-2	T	T
Residual Indentation	EN ISO 24343-1	≤0.1mm	≤0.1mm
Dimensional Stability	EN ISO 23999	≤0.25%	≤0.25%
Curling		≤2mm	≤2mm
Color Fastness to Light	EN ISO 105-B02	≥6	≥6
Castor Chair Test	EN ISO 4918	No Change	No Change
Burning Characteristic	EN 13501-1	Bfl-s1	Bfl-s1
Chemical Resistance	EN ISO 26987	No Change	No Change
Slip Resistance	EN 13893	Class DS	Class DS
	DIN 51130	R9	R9

To order LG Decotile go to www.dctuk.com