



# SoundClick

## Underlay

Lightweight underlay for click vinyl flooring, with anti-slip top surface.

- No slip-ups with the floor**  
 SoundClick has an anti-slip top surface, which holds the flooring firmly in place. It makes it so much easier to fit, without the pieces sliding around. And when the floor is down, you can guarantee it won't be going anywhere – even if it takes the full force of family use!
- Quietly does it...**  
 The dense, closed cell polyolefin foam of SoundClick gives it 18dB sound reduction – so it deadens any loud noise and makes the whole room quieter.
- That warm feeling**  
 SoundClick has an ultra low tog value of just 0.27, which means your underfloor heating system works much more efficiently, keeping your floor lovely and warm!

### Technical Data


Properties	Unit	Value	Test Method
<b>Thickness of the underlay</b> measured at 100 Pa pre-load	mm	1.5 ± 10%	EN 823
<b>Impact Sound Reduction under 4mm Click</b>	dB	≥ 18	ISO 140 - 717
<b>Compressive strength</b>			
• CS0.2: tested at 0.2 mm compression under 100 Pa pre-load	kPa	≥ 200	DIN EN 826
• CS0.2: tested at 0.5 mm compression under 100 Pa pre-load	kPa	≥ 400	DIN EN 826
<b>Compressive creep under long term static load</b>			
• max. thickness loss of ≤ 0.2 mm extrapolated to 10 years	kPa	≤ 40	EN 1606
<b>Dynamic load</b>			
• number of load cycles at max. deformation ≤ 0.2 mm	no. of cycles	≥ 1 Mio	EN 13793
• alternating cycles from min = 100 Pa to max = 70 kPa			
<b>Punctual conformability</b> to even out unevenness of subfloor	mm	0.7	FprCEN TS 16354
<b>Thermal resistance</b> at 24°C mean temperature	m <sup>2</sup> k/W	0.027	EN 12667 / EN 12664
<b>Water vapour diffusion resistance of the complex</b>	m	≥ 80	EN 12667 / EN 12086
• diffusion-equivalent air layer thickness, SD-value			
<b>Water absorption</b> by foam	Vol%	< 1	DIN53571
<b>Fire classification (reaction to fire)</b>	Class	Efl	EN ISO 11925-2

The information given above may vary and is partly based on information from our suppliers. It represents the prevailing level of expertise and is not binding in a legal sense. The compliance of legal requirements lies within the customers own responsibility.


Simply Better

Heavy Traffic

Click Vinyl

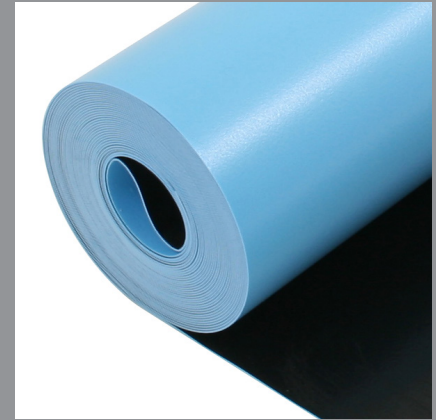

### Best for

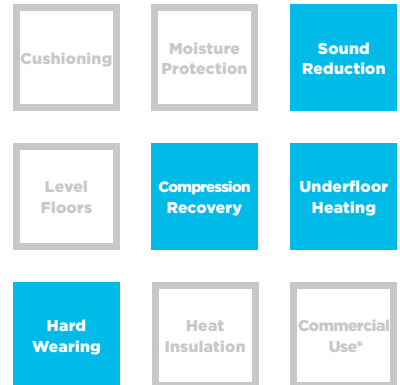

\*Suitable for hotels and public buildings

### Available in

<b>Code</b>	QAU-SCL-01
<b>Size</b>	1m x 15m (15m <sup>2</sup> )
<b>Thickness</b>	1.5mm