



Codec

12 Colourways

Heavy Contract

10 Year Warranty

100% Solution Dyed Nylon

Suitable for Commercial, Education, Health and Retail markets Recyclable - Product can be repurposed at the end of its lifecycle as a non standard option

BREEAM° 'A+' Rated

12 Colourways

BREEAM 'A+' Rated Total recycled content of up to 65%

DESIGN LOOP



BROADLOOM DESIGN TESSELLATED DESIGN











BREEAM° 'A+' Rated AVAILABLE FROM STOCK




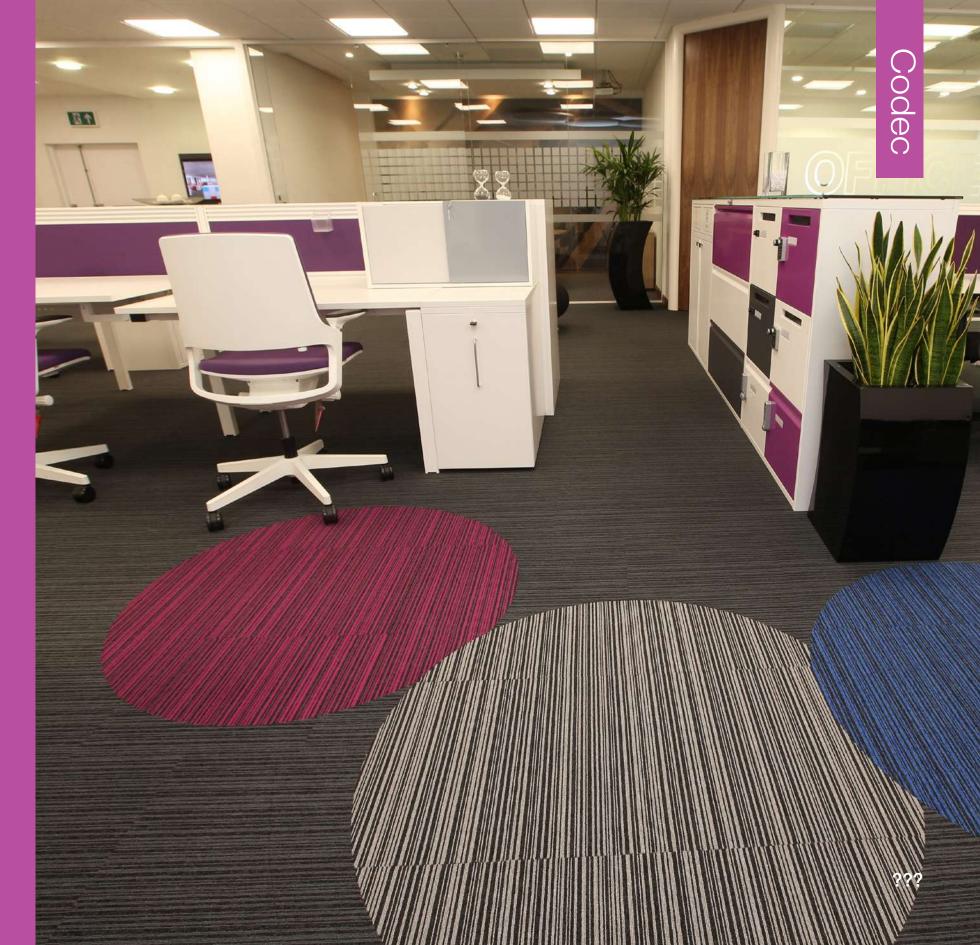



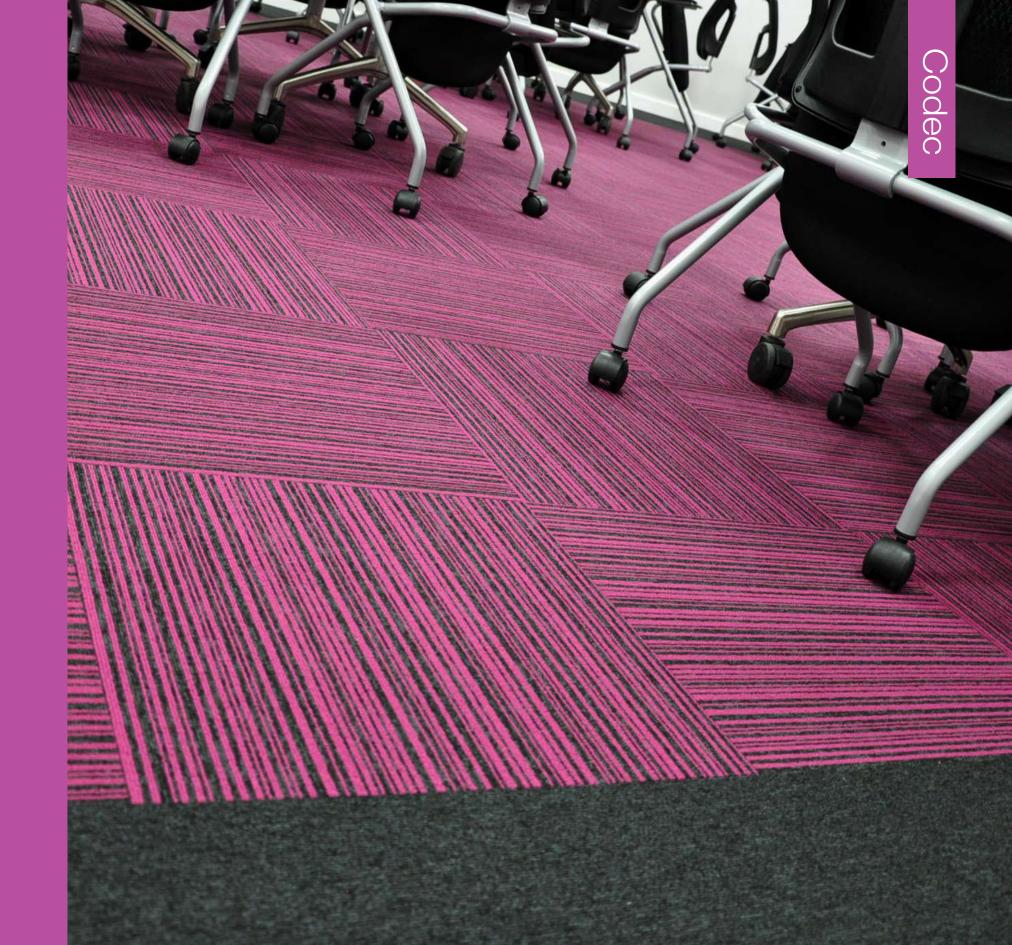



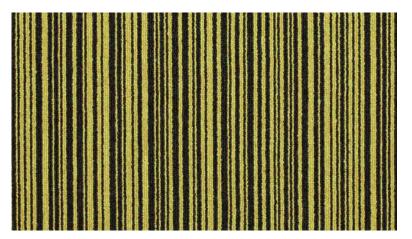

5151 – Pathway (LRV - Y11.59)



5229 – Accent Pathway (LRV - Y21.82)



2181 – Index (LRV - Y4.60)



7181 – Hex (LRV - Y4.77)



2247 – Accent Index (LRV - Y7.73)



7248 – Accent Hex (LRV - Y7.22)



6181 – Digital (LRV - Y4.32)



8181 – Axis (LRV - Y4.00)



9191 – Binary (LRV - Y9.59)



6176 – Accent Digital (LRV - Y4.62)



8228 – Accent Axis (LRV - Y5.78)




9183 – Accent Binary (LRV - Y17.50)

Style	Tufted Loop Pile Tile 1/10" gauge
Yarn Construction	100% solution dyed nylon
Pile Yarn Weight	600 gsm
Pile Height	3mm
Total Weight	4380 gsm
Total Thickness	6mm
Backing	100% Envirobase - minimum of 75% recycled material
Additional Backing 100% Komfort Bac available on request	
Dimensions	50cm x 50cm
Wear Classification	Heavy Contract Class 33
Luxury Class	LC1
Anti-static Anti-static	<2Kv body voltage. Suitable for use with computers
Colour Fastness	To Light (BS EN ISO105-B02) Better than 6
	To Shampoo BS 1006 - UK - TB Change in shade 4 - 5
	To Rubbing (BS EN ISO105-X12) Wet 4 - 5, Dry 4 - 5
Flammability	Floorcoverings tested to BS4790 Low Radius of Char
	Euroclass Flammability Bfl-s1 (BS EN 13501)
Castor Chair Test	BS EN 985 r value 2.8 Suitable for continuous use
Warranty	10 Years
VOC Content	E1 in relation to EN 14041:2004
Environmental Status	Breeam® 'A+' Rated



Farfield Park
Manvers
Wath-upon-Dearne
Rotherham, S63 5DB

T. +44 (0) 1709 763 839
F. +44 (0) 1709 763 813
E. sales@paragon-carpets.co.uk
W. www.paragon-carpets.co.uk

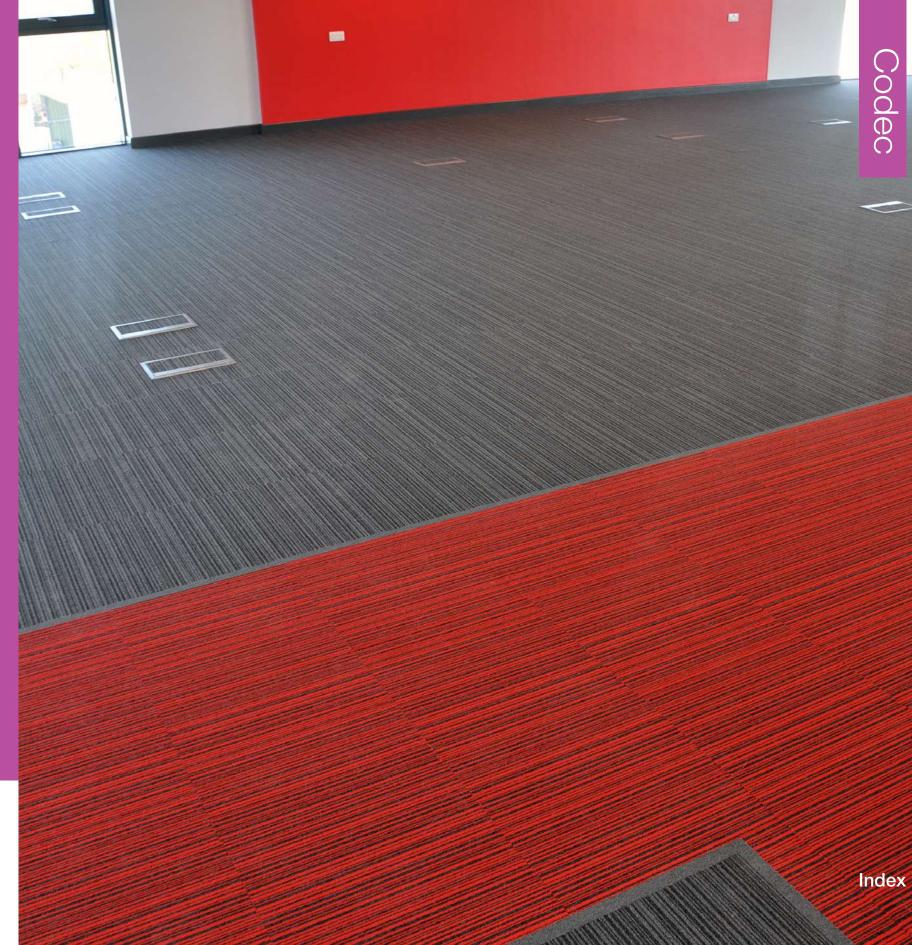



INSTALLATION

Sub floors should be clean, dry and flat and prepared in accordance with BS5325. Timber floors should be covered with plywood or other appropriate sheet materials. For tiles use F Ball tackifier F41 or Laybond 79. Tiles may be laid tessellated or broadloom. Tiles should be allowed to condition for a minimum of 24 hours at the expected temperature and humidity prevailing when the building is in use. Always use seam sealer if an impermeable finish is required. Further installation information is available from the Paragon Sales Office.

COLOUR

For technical reasons, as with all textile materials, it may not be possible to colour match from different batches. Orders requiring colour match should be placed at the same time. Production may therefore show variations to the sample card.

MAINTENANCE

It is recommended that a maintenance schedule be initiated from the date of installation to achieve maximum life expectancy of the product. Regular vacuum cleaning with a twin motored upright vacuum cleaner is essential. All spillages and stains should be attended to immediately. For detailed information, please consult the Paragon cleaning and maintenance guide. It is imperative that all internal carpets are well protected from outside soiling and moisture by the use of barrier matting such as MatWorks, also available from Paragon.



Wath-upon-Dearne Rotherham, S63 5DB W. www.paragon-carpets.co.uk

T. +44 (0) 1709 763 839

F. +44 (0) 1709 763 813














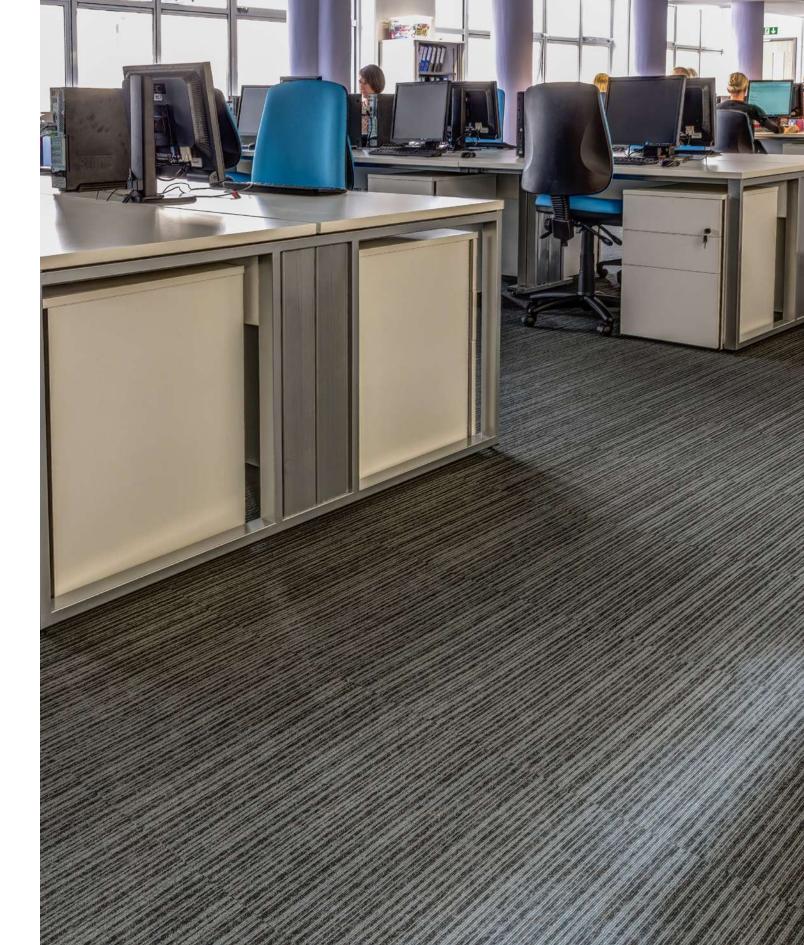

Experience Carpet Tiles



Codec

12 Colourways

A Division of National Floorcoverings Ltd. Farfield Park, Manvers, Wath-upon-Dearne, Rotherham, S63 5DB T. +44(0) 1709 763839Samples Department: +44(0) 1709 763805. Order Free Samples Online E. samples@paragon-carpets.co.uk www.paragon-carpets.co.uk | www.mat-works.co.uk





Download our free apps NOW

Search Paragon Carpets



















BROADLOOM DESIGN