


Experience Carpet Tiles

paragon
CARPET TILES




Macaw / Macaw Stripe

Macaw : 6 Colourways / Macaw Stripe : 4 Colourways



BROADLOOM DESIGN



TESSELLATED DESIGN



AVAILABLE
FROM STOCK




MADE IN BRITAIN

Macaw / Macaw Stripe


Macaw : 6 Colourways / Macaw Stripe : 4 Colourways




Suitable for use with computers	General usage Tufted Loop Pile Tile 1/10" gauge	Macaw 6 Colourways Macaw Stripe 4 Colourways	420 gsm Pile Yarn Weight	100% Solution Dyed Polypropylene
------------------------------------	---	---	-----------------------------	-------------------------------------



BROADLOOM DESIGN



TESSELLATED DESIGN

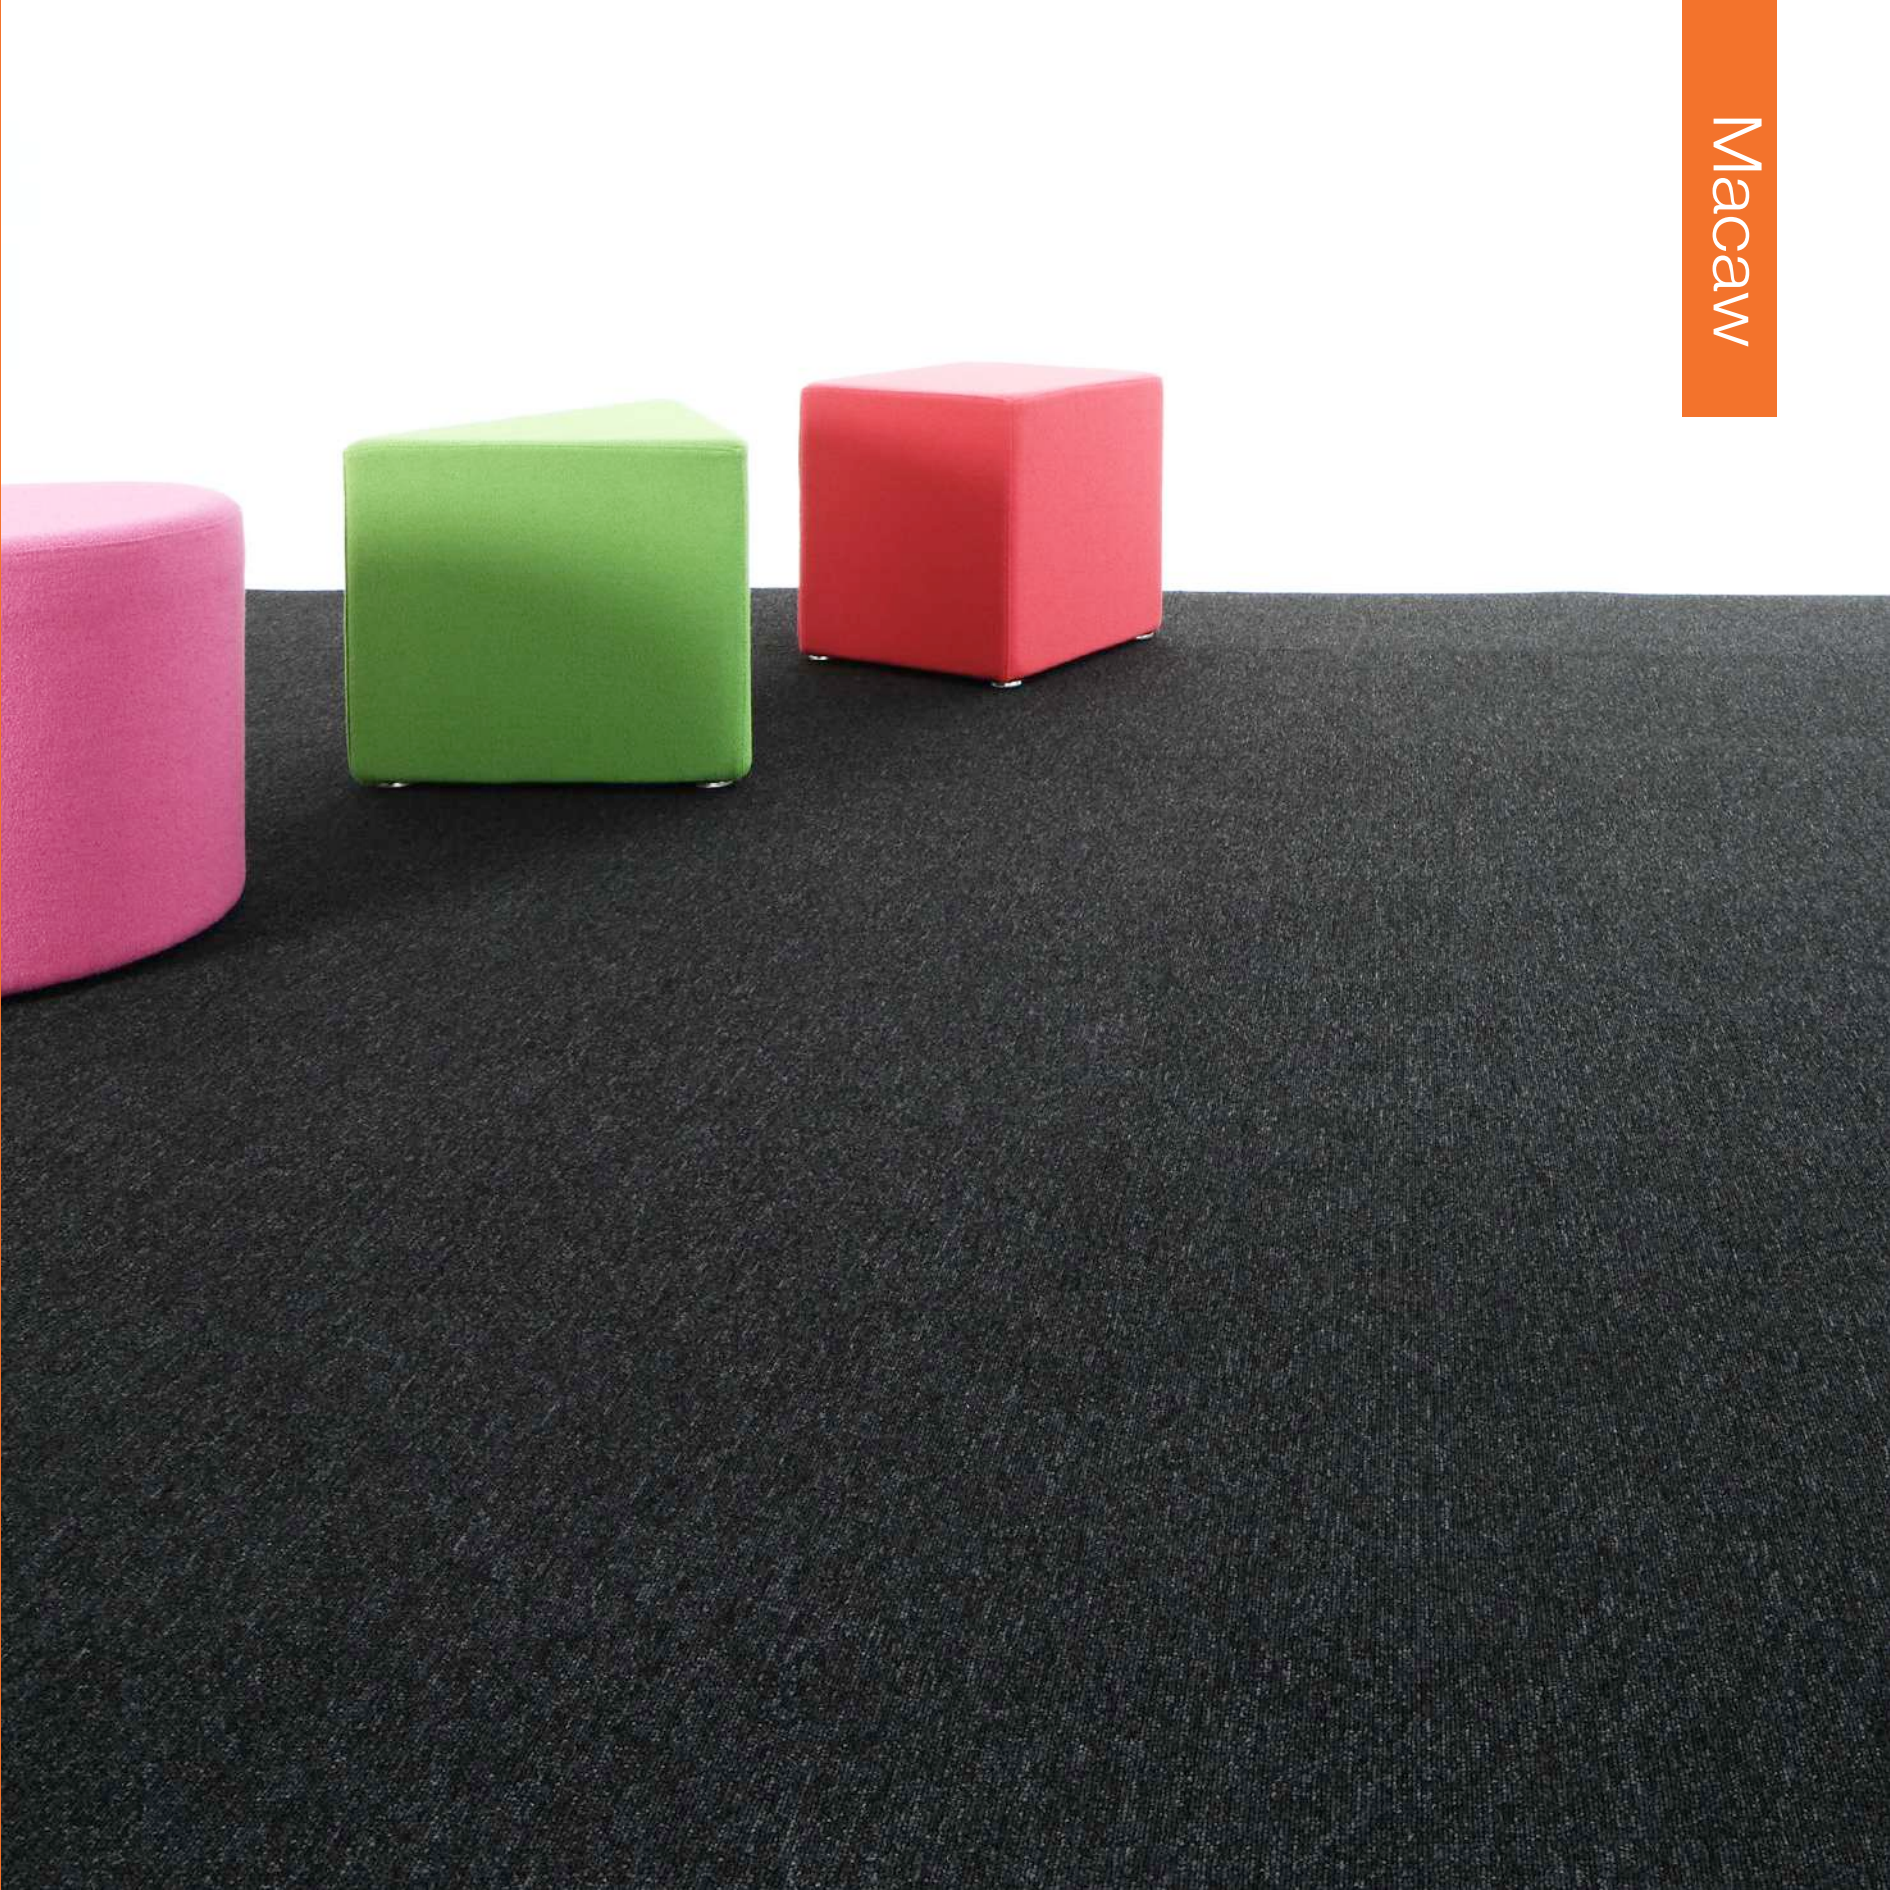


Macaw



Style	Tufted Loop Pile Tile 1/10” gauge
Yarn Construction	100% Solution Dyed Polypropylene
Pile Yarn Weight	420 gsm
Pile Height	3.5mm
Total Weight	4200 gsm
Total Thickness	6mm
Backing	100% Envirobase - minimum of 75% recycled material
Dimensions	50cm x 50cm
Wear Classification	General usage
Anti-static	<2Kv body voltage. Suitable for use with computers
Static Load to BS 4939	Not less than 80% recovery after 24 hours
Colour Fastness	To Light (BS EN ISO105-B02) Better than 6
	To Shampoo BS 1006 - UK - TB Change in shade 4 - 5
	To Rubbing (BS EN ISO105-X12) Wet 4 - 5, Dry 4 - 5
Flammability	Floorcoverings tested to BS4790 Low Radius of Char
	(Hot Metal Nut Test)
VOC Content	Euroclass Flammability (BS EN 13501) Efl
	E1 in relation to EN 14041:2004

Macaw Stripe to be laid tessellated only



Macaw Stripe

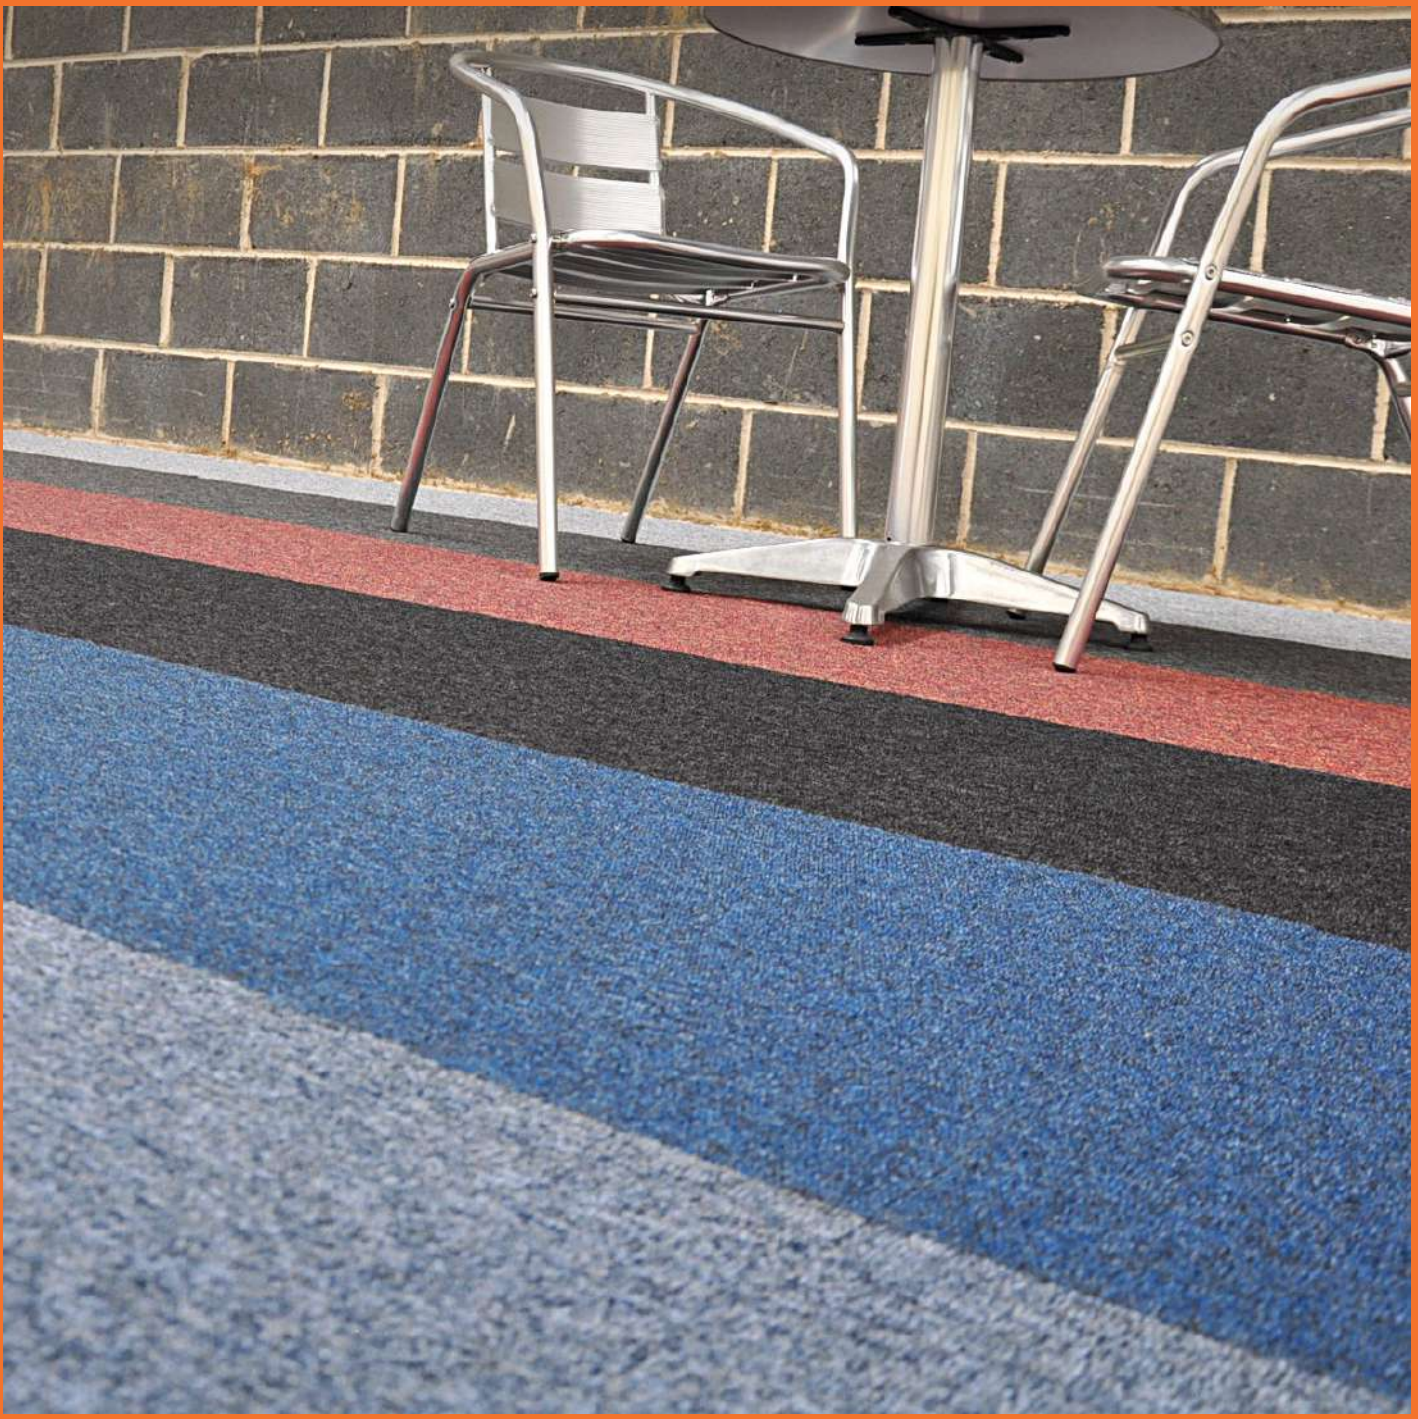


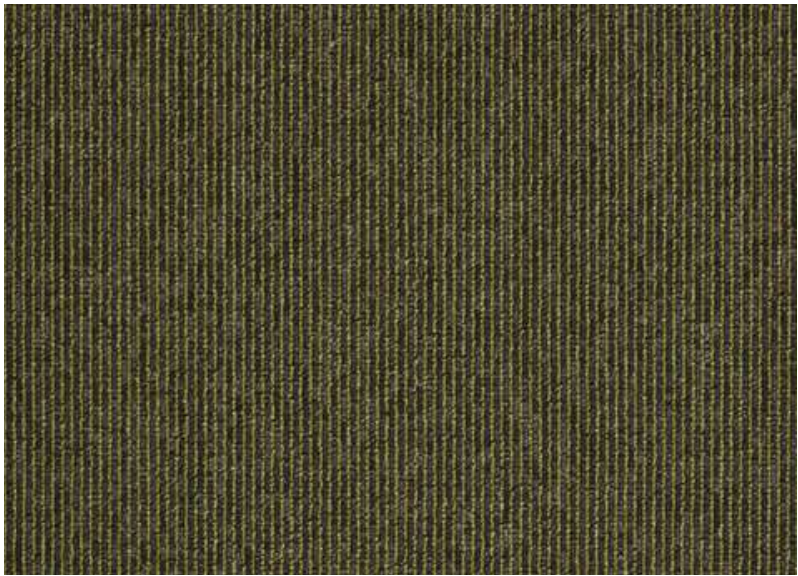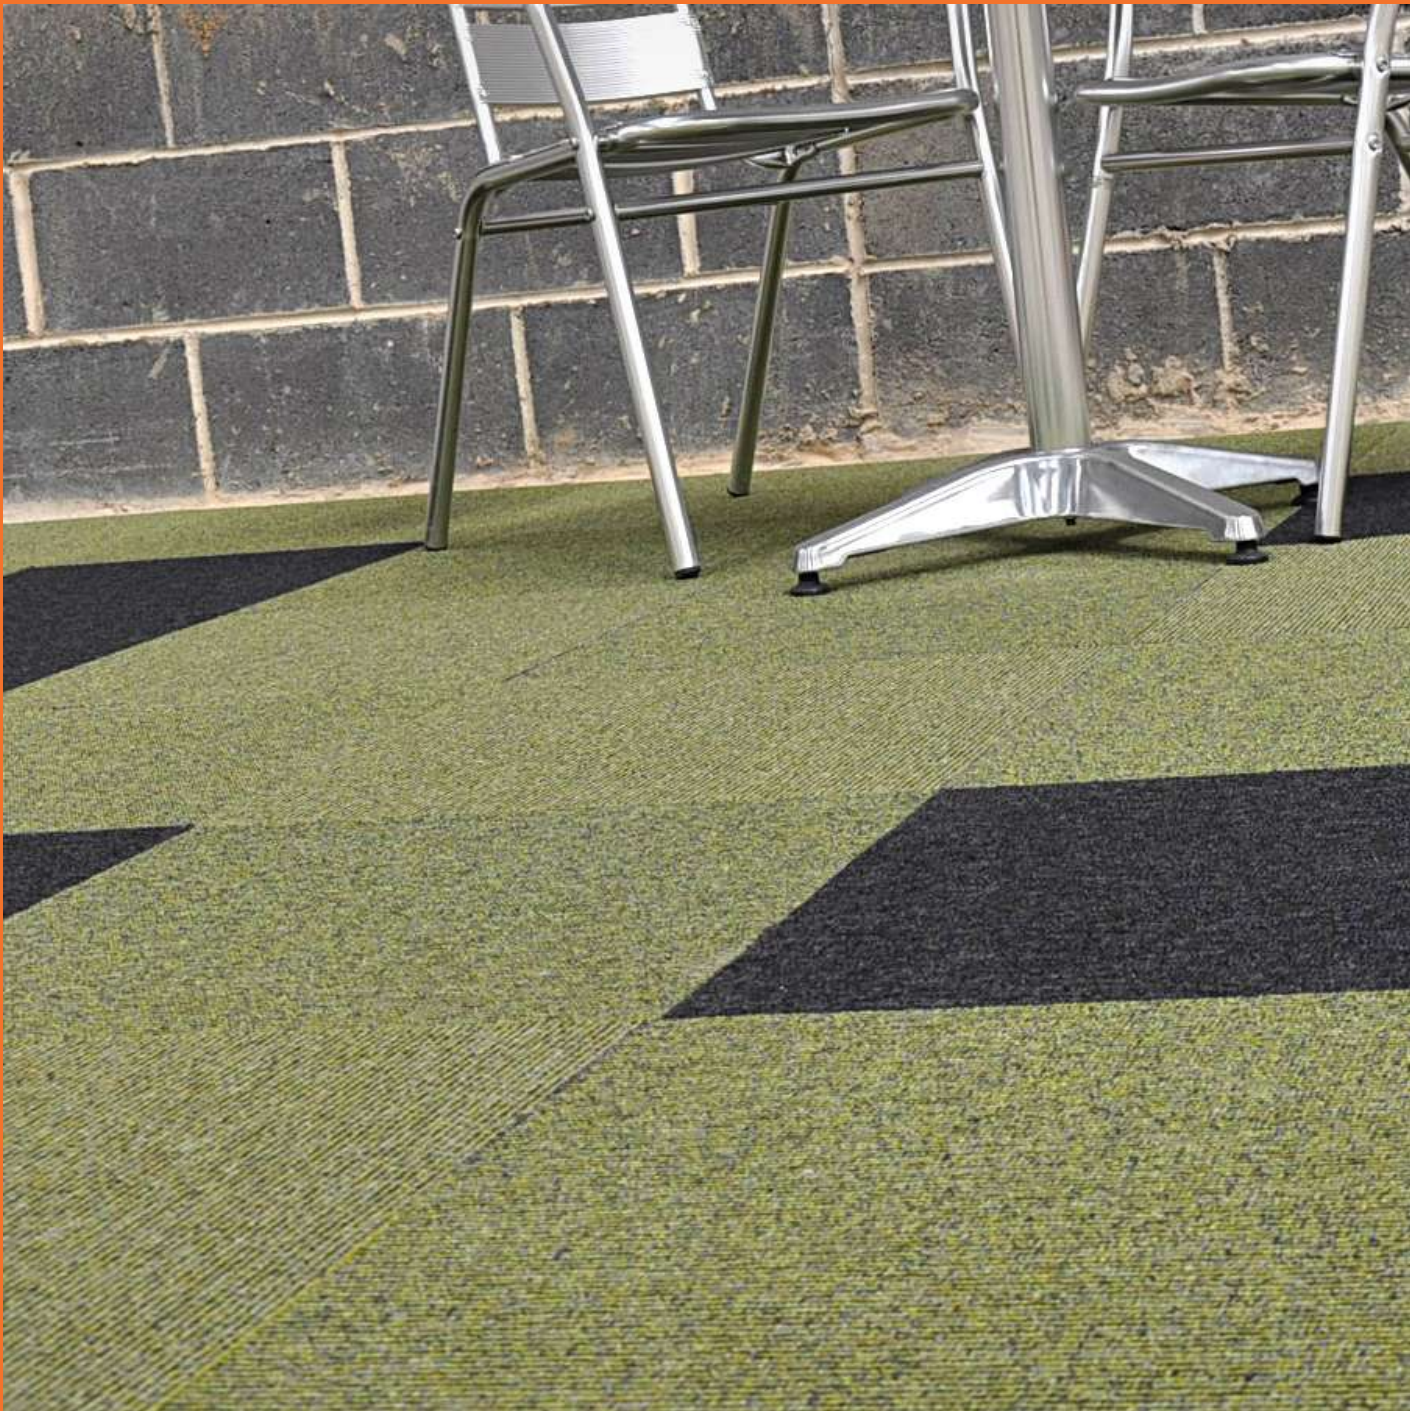

Lime / Quartz Stripe
(LRV - Y9.33)




Jet / Quartz Stripe
(LRV - Y3.82)

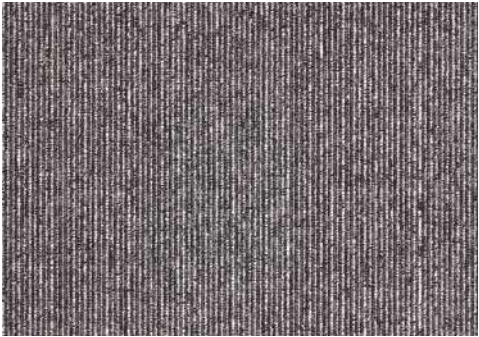

Quartz / Pewter Stripe
(LRV - Y12.56)



Sapphire / Aegean Stripe
(LRV - Y6.75)

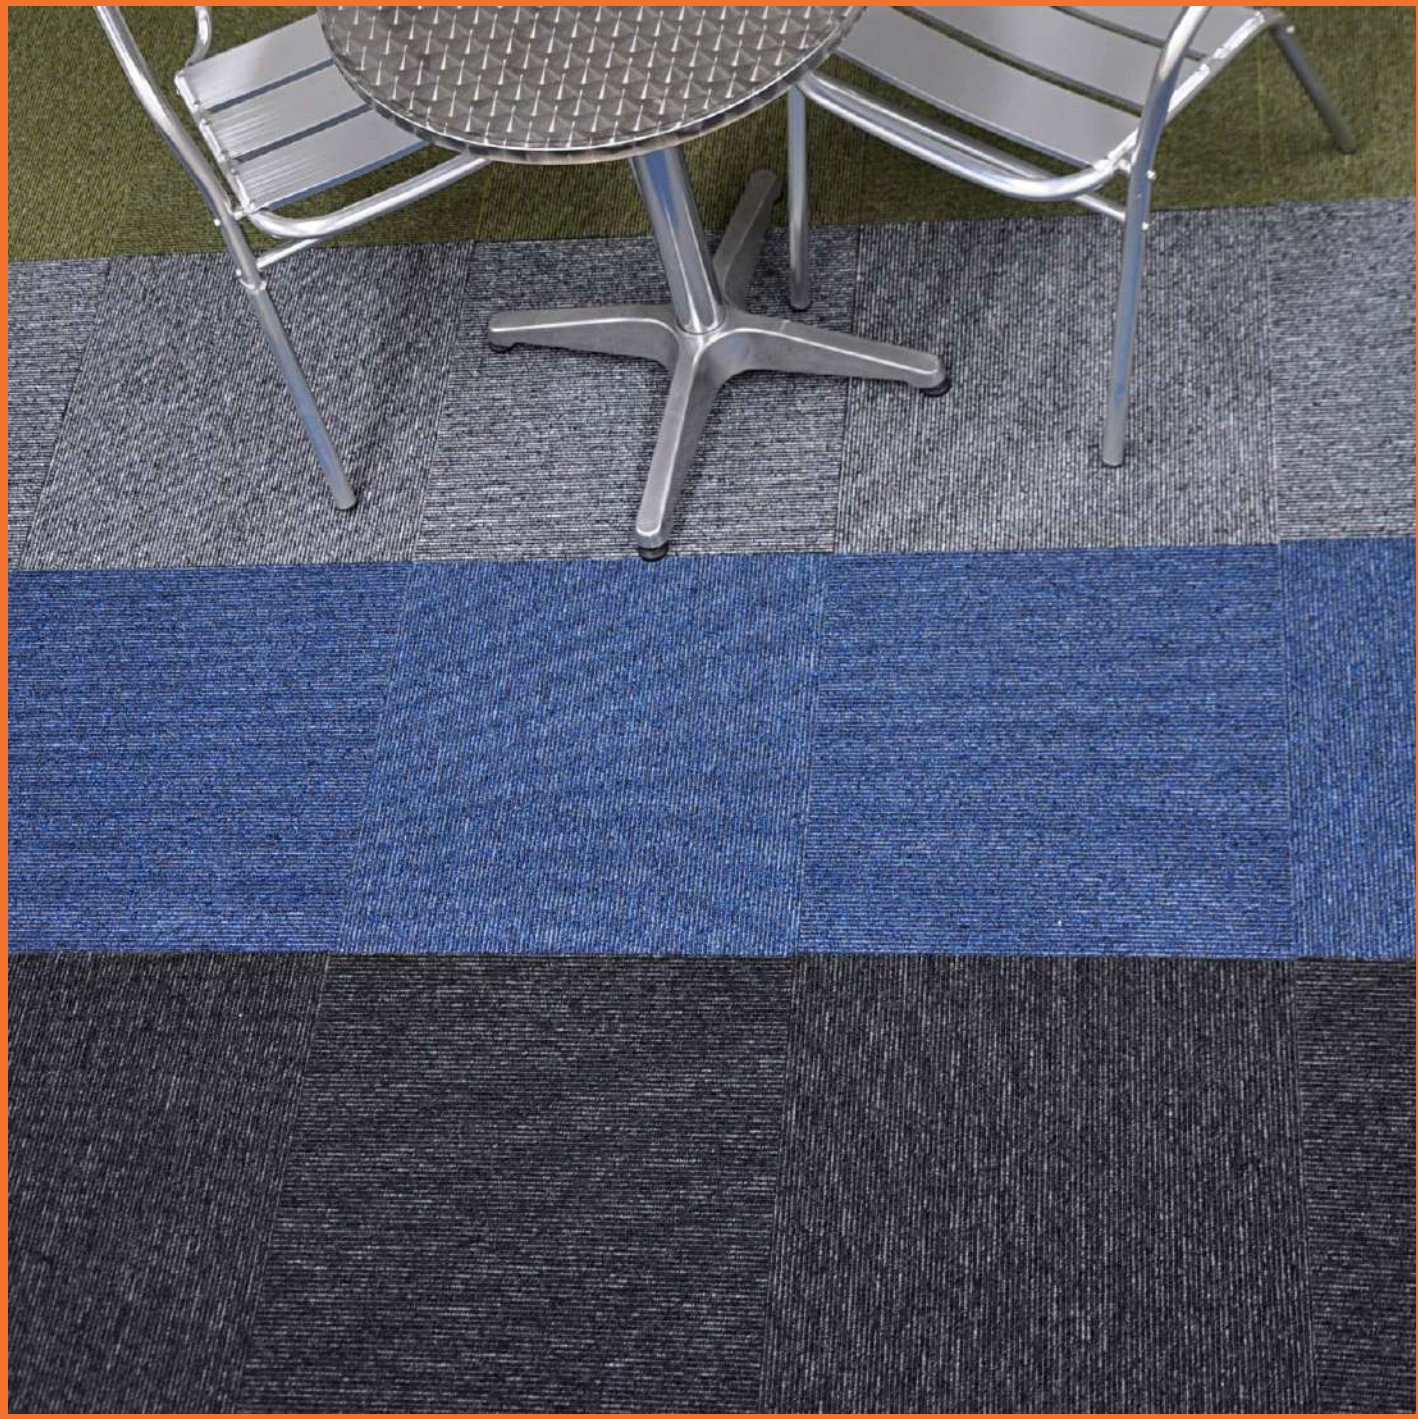

Maccaw Stripe

INSTALLATION

Sub floors should be clean, dry and flat and prepared in accordance with BS5325. Timber floors should be covered with plywood or other appropriate sheet materials. For tiles use F Ball tackifier F41 or Laybond 79. Tiles may be laid tessellated or broadloom. Tiles should be allowed to condition for a minimum of 24 hours at the expected temperature and humidity prevailing when the building is in use. Always use seam sealer if an impermeable finish is required. Further installation information is available from the Paragon Sales Office.

COLOUR

For technical reasons, as with all textile materials, it may not be possible to colour match from different batches. Orders requiring colour match should be placed at the same time. Production may therefore show variations to the sample card.

MAINTENANCE


It is recommended that a maintenance schedule be initiated from the date of installation to achieve maximum life expectancy of the product. Regular vacuum cleaning with a twin motored upright vacuum cleaner is essential. All spillages and stains should be attended to immediately. For detailed information, please consult the Paragon cleaning and maintenance guide. It is imperative that all internal carpets are well protected from outside soiling and moisture by the use of barrier matting such as MatWorks, also available from Paragon.



Aegean
(LRV - Y8.17)



Paprika
(LRV - Y6.24)

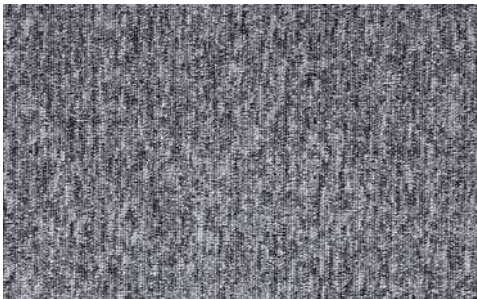

Pewter
(LRV - Y15.29)



Quartz
(LRV - Y5.94)



Sapphire
(LRV - Y5.02)



Jet
LRV - Y18.68)

Experience Carpet Tiles


paragon
CARPET TILES




Macaw / Macaw Stripe

Macaw : 6 Colourways / Macaw Stripe : 4 Colourways

A Division of National Floorcoverings Ltd.
Farfield Park, Manvers, Wath-upon-Deane, Rotherham, S63 5DB T. +44(0) 1709 763839
Samples Department: +44(0) 1709 763805.
Order Free Samples Online E. samples@paragon-carpets.co.uk
www.paragon-carpets.co.uk | www.mat-works.co.uk



BROADLOOM DESIGN



TESSELLATED DESIGN



i colour wheel www.paragon-app.com



Download our free apps NOW

Search Paragon Carpets

