



Solaris

15 Colourways



Suitable for office, commercial, retail, schools, colleges, and leisure

Heavy Contract Class 33

Solaris 15 Colourways

Warranty

100% Invista Nylon Up to 50% of the total product is recycled content

CUT PILE







TESSELLATED DESIGN















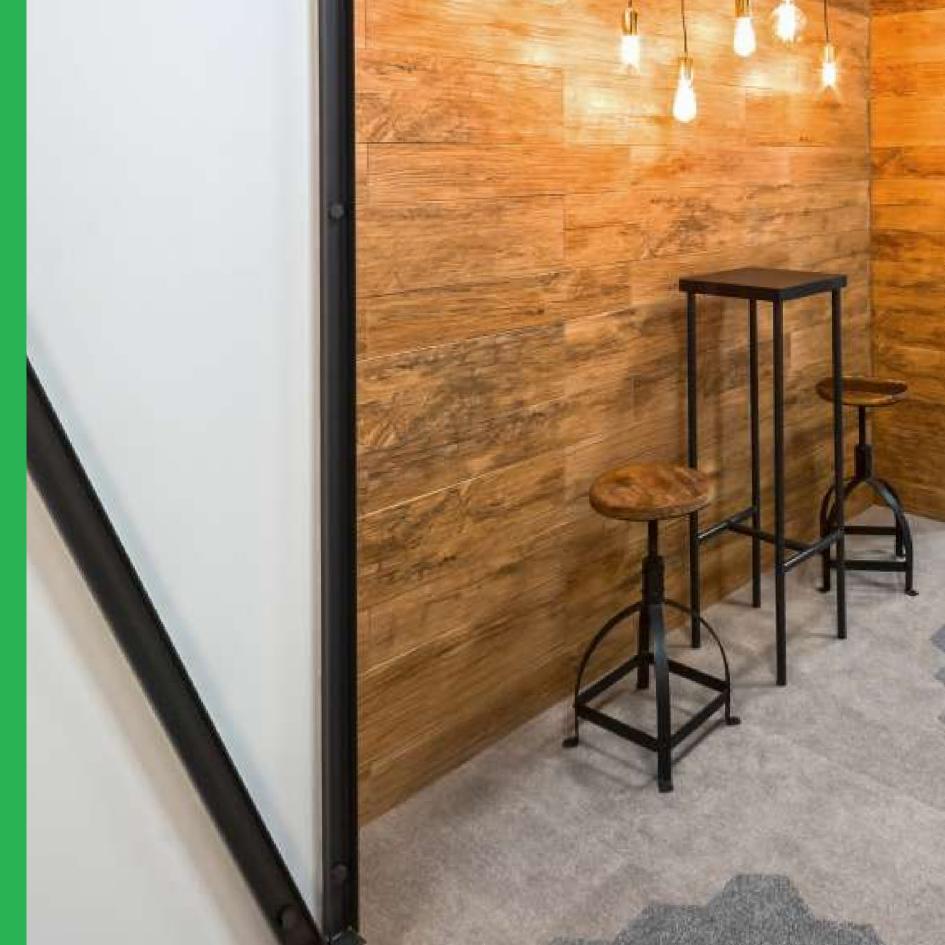



Style	Tufted Cut Pile Tile 1/10" gauge
Yarn Construction	100% Invista Nylon
Pile Yarn Weight	1100 gsm
Pile Height	5.5mm
Total Weight	4950 gsm
Total Thickness	8mm
Backing	100% Envirobase - minimum of 75% recycled material
Additional Backing	100% Komfort Bac available on request
Dimensions	50cm x 50cm
Wear Classification	Heavy Contract Class 33
Luxury Class	LC1
Anti-static	Less than 2Kv
	Suitable for use with computers
Colour Fastness	Light BS EN ISO105-BO2: 5
	To Water BS EN ISO105-E01: 4
	Rubbing BS EN ISO105-X12: 4 Dry, 3 Wet
Flammability	BS4790 Low Radius of Char
	BS EN 13501-1 Bfl-s1
Castor Chair Test	Test BS EN 985: >2.8 Suitable for continuous use
Warranty	10 Year Warranty
VOC Content	E1 in relation to EN 14041:2004



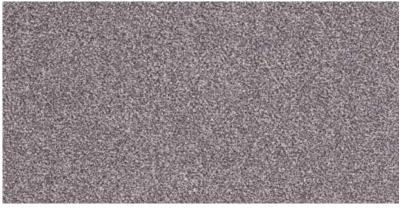

Charon (LRV - Y12.52)



Nix (LRV - Y6.32)



Juno (LRV - Y2.62)



Oberon (LRV - Y10.72)



Titan (LRV - Y19.34)



Eris (LRV - Y3.83)



Saturn (LRV - Y2.58)



Telesto (LRV - Y7.96)



Mercury (LRV - Y9.01)



Pandora (LRV - Y7.47)



Phobos (LRV - Y3.59)



Callisto (LRV - Y4.66)



Janus (LRV - Y3.98)



Calypso (LRV - Y16.47)



Himalia (LRV - Y5.43)

INSTALLATION

Sub floors should be clean, dry and flat and prepared in accordance with BS5325. Timber floors should be covered with plywood or other appropriate sheet materials. For tiles use F Ball tackifier F41 or Laybond 79. Tiles may be laid tessellated or broadloom. Tiles should be allowed to condition for a minimum of 24 hours at the expected temperature and humidity prevailing when the building is in use. Further installation information is available from the Paragon Sales Office.

COLOUR

For technical reasons, as with all textile materials, it may not be possible to colour match from different batches. Orders requiring colour match should be placed at the same time. Production may therefore show variations to the sample card.

MAINTENANCE

It is recommended that a maintenance schedule be initiated from the date of installation to achieve maximum life expectancy of the product. Regular vacuum cleaning with a twin motored upright vacuum cleaner is essential. All spillages and stains should be attended to immediately. For detailed information, please consult the Paragon cleaning and maintenance guide. It is imperative that all internal carpets are well protected from outside soiling and moisture by the use of barrier matting such as MatWorks, also available from Paragon.




























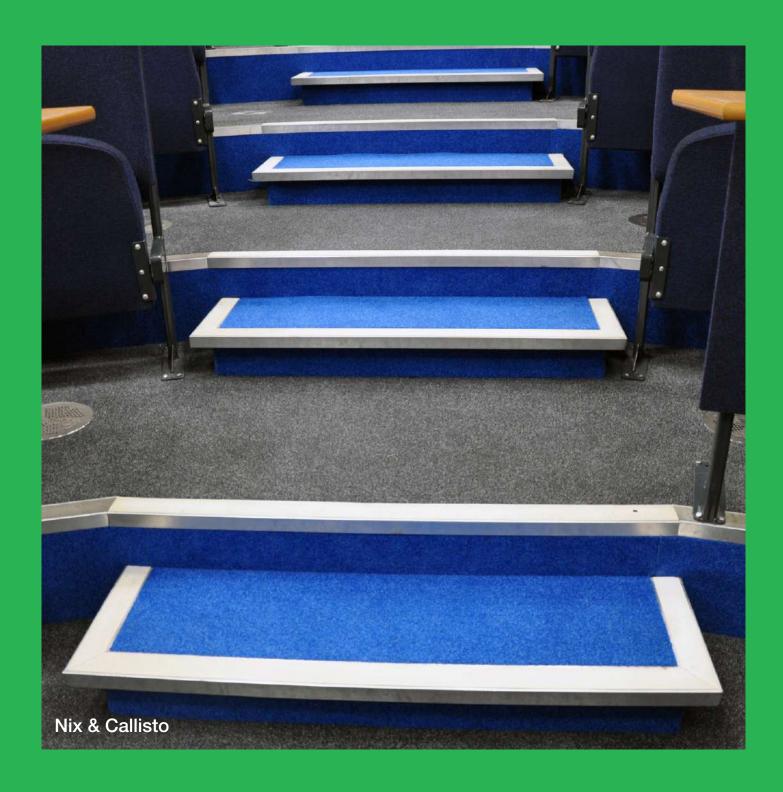

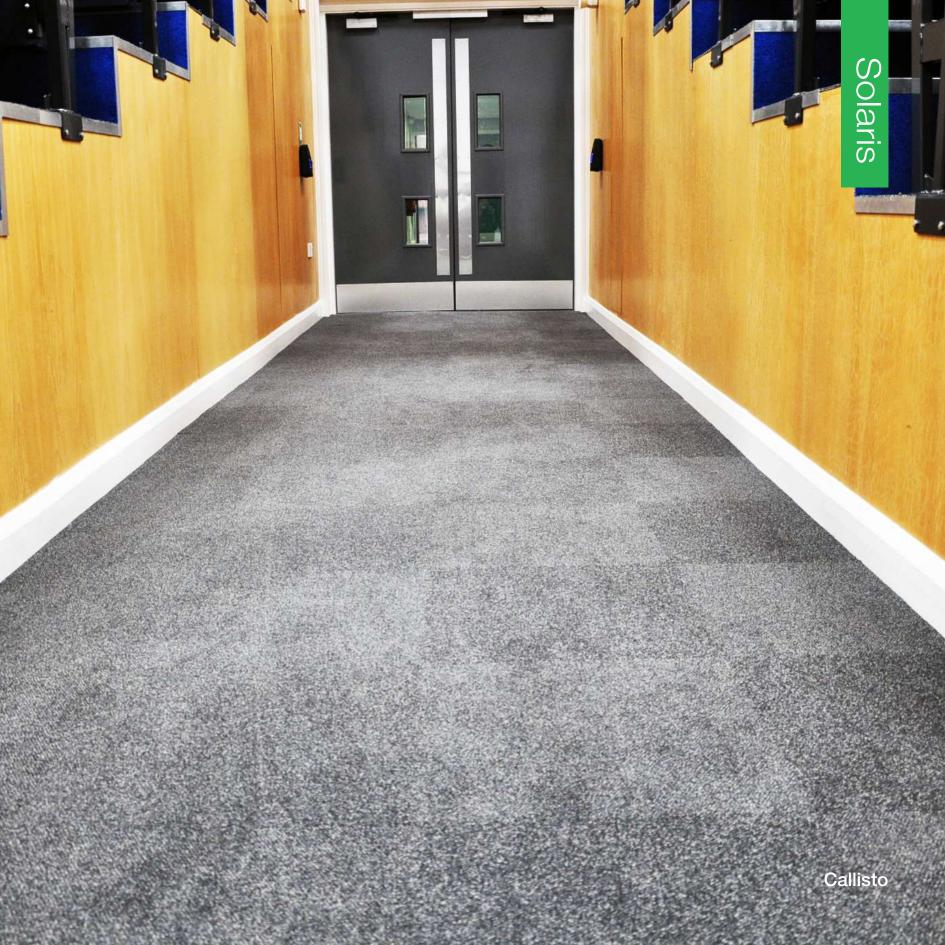





Experience Carpet Tiles

www.paragon-carpets.co.uk | www.mat-works.co.uk



Solaris

15 Colourways

A Division of National Floorcoverings Ltd.
Farfield Park, Manvers, Wath-upon-Dearne, Rotherham, S63 5DB T. +44(0) 1709 763839
Samples Department: +44(0) 1709 763805.
Order Free Samples Online E. samples@paragon-carpets.co.uk





BROADLOOM DESIGN













Download our free apps NOW

Search Paragon Carpets





