


# LG Hausys flooring DECOCLICK

## 1. Product Structure

**Size : 3.2T/4.0T X 150mm X 1,219mm (W/L 0.3mm)**

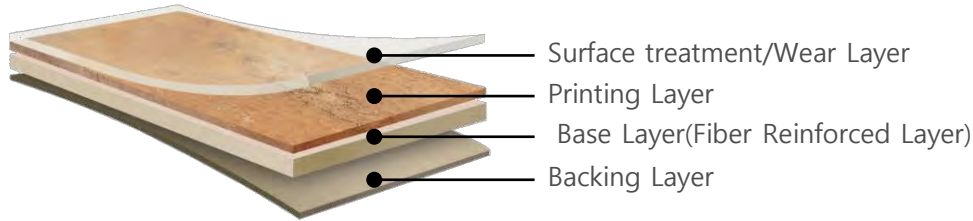

## 2. Features

- **Phthalate Free**
  - Use 100% Phthalate Free plasticizer only
  - Free of 6 types of harmful phthalate plasticizer(DOP, BBP, DBP, DIDP, DnOP, DINP)
- **Stronger Lock**
  - Patent-pending Fiber Reinforced Layer strengthens locking strength
- **Easy Clean UV coating**
  - LG's exclusive PUR treatment technology provides stronger resistance to contaminants
  - Easy cleaning and low maintenance cost(No wax & No polish needed)

## 3. Technical Data

Characteristic	Standard	DECOCLICK	
		3.2T (W/L 0.3mm)	4.0T (W/L 0.3mm)
Type of Flooring	EN ISO 10582	PVC Heterogeneous	PVC Heterogeneous
Size	EN ISO 24342	≤0.15%	≤0.15%
Straightness & Squareness		≤0.35mm	≤0.35mm
Classification	EN 685	Class 23/31	Class 23/31
Overall Thickness	EN ISO 24346	3.2mm	4.0mm
Wear Layer Thickness	EN ISO 24340	0.3mm	0.3mm
Wear Resistance	EN 660-2	T	T
Residual Indentation	EN ISO 24343-1	≤0.1mm	≤0.1mm
Dimensional Stability	EN ISO 23999	≤0.25%	≤0.25%
Curling		≤2mm	≤2mm
Color Fastness to Light	EN ISO 105-B02	≥6	≥6
Castor Chair Test	EN ISO 4918	No Change	No Change
Burning Characteristic	EN 13501-1	Bfl-s1	Bfl-s1
Chemical Resistance	EN ISO 26987	No Change	No Change
Slip Resistance	EN 13893 DIN 51130	Class DS R10	Class DS R10